



17,1 m (120 Kg) / 15,2 m (200 Kg)



15,1 m (120 Kg) / 13,2 m (200 Kg)




6,8 m (120 Kg) / 5,2 m (200 Kg)



350°



Asportabile, alluminio, 1400x700xh1100
 Removable, aluminium, 1400x700xh1100
 Démontable, aluminium, 1400x700xh1100
 Alluminio, 1400x700xh1100
 Abnehmbar, alu, 1400x700xh1100
 Aluminium, 1400x700xh1100
 Aluminium, 1400x700xh1100
 СЪЕМНАЯ - 1300x700x1100 мм АЛЮМИНИЕВАЯ)



Idraulici
 Hydraulic
 Hydrauliques
 Hidráulico
 Hydraulisch
 Hydraulisch
 Hydraulisk
 ГИДРАВЛИЧЕСКОЕ



120 Kg - 1 operatore / 200 Kg - 2 operatori
 120 Kg - 1 operator / 200 Kg - 2 operators
 120 Kg - 1 opérateur / 200 Kg - 2 opérateurs
 120 Kg - 1 operario / 200 Kg - 2 operarios
 120 Kg - 1 bediener / 200 Kg - 2 bediener
 120 Kg - 1 personen / 200 Kg - 2 personen
 120 Kg - 1 operatører / 200 Kg - 2 operatører
 120Kg кг - 1 ЧЕЛОВЕК / 200Kg кг - 2 ЧЕЛОВЕКА



2050 mm



4395 mm



780 mm




Ribaltabili a discesa idraulica
 Collapsible, hydraulic descent
 Escamotables à descente hydraulique
 Replegables de bajada hidráulica
 Klappbar mit hydraulisch absenken
 Hydraulisch uitvouwbare stempelpoten
 Sammenklappelig, hydraulisk sænkning
 СКЛАДЫВАЮЩИЕСЯ, ГИДРАВЛИЧЕСКОЕ ОПУСКАНИЕ






Honda monocilindrico silenzioso/elettrico 220V
 Single-cylinder noiseless honda/electric 220V
 Honda monocylindrique avec silencieux/electrique 220V
 Honda monocilindrico silenciado/electrico 220V
 Geräuschloser einzylindermotor, honda
 Geluidsarm honda/electrische 220v
 Et-cylindret støjsvag honda/elektrisk 220v
 ОДНОЦИЛИНДРОВЫЙ БЕЗШУМНЫЙ ЭЛЕКТРИЧЕСКИЙ 220В




Cingolata 1,5 km/h
 Tracked 1,5 km/h
 Sue chenilles 1,5 km/h
 Oruga 1,5 km/h
 Raupen / 1,5 km/h
 Rups / 1,5 km/h
 Bæltedrevet / 1,5 km/t
 ГУСЕНИЧНОЕ / 1,5 км/ч



1980 kg

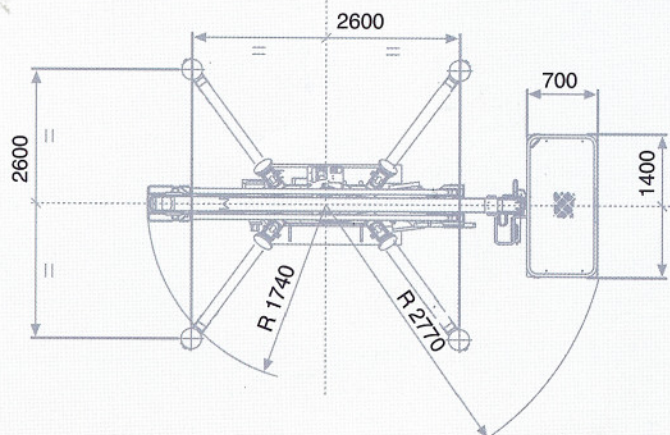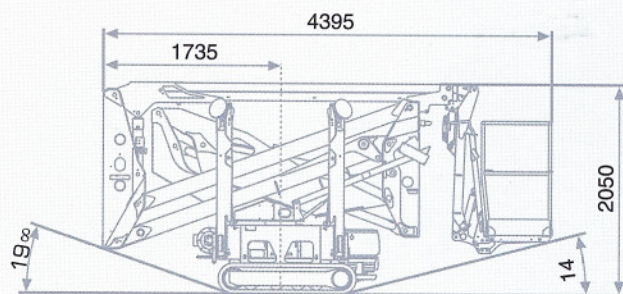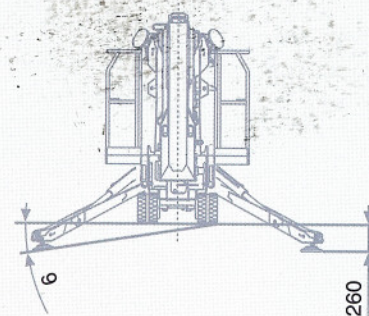

octopussy 1715 TWIN

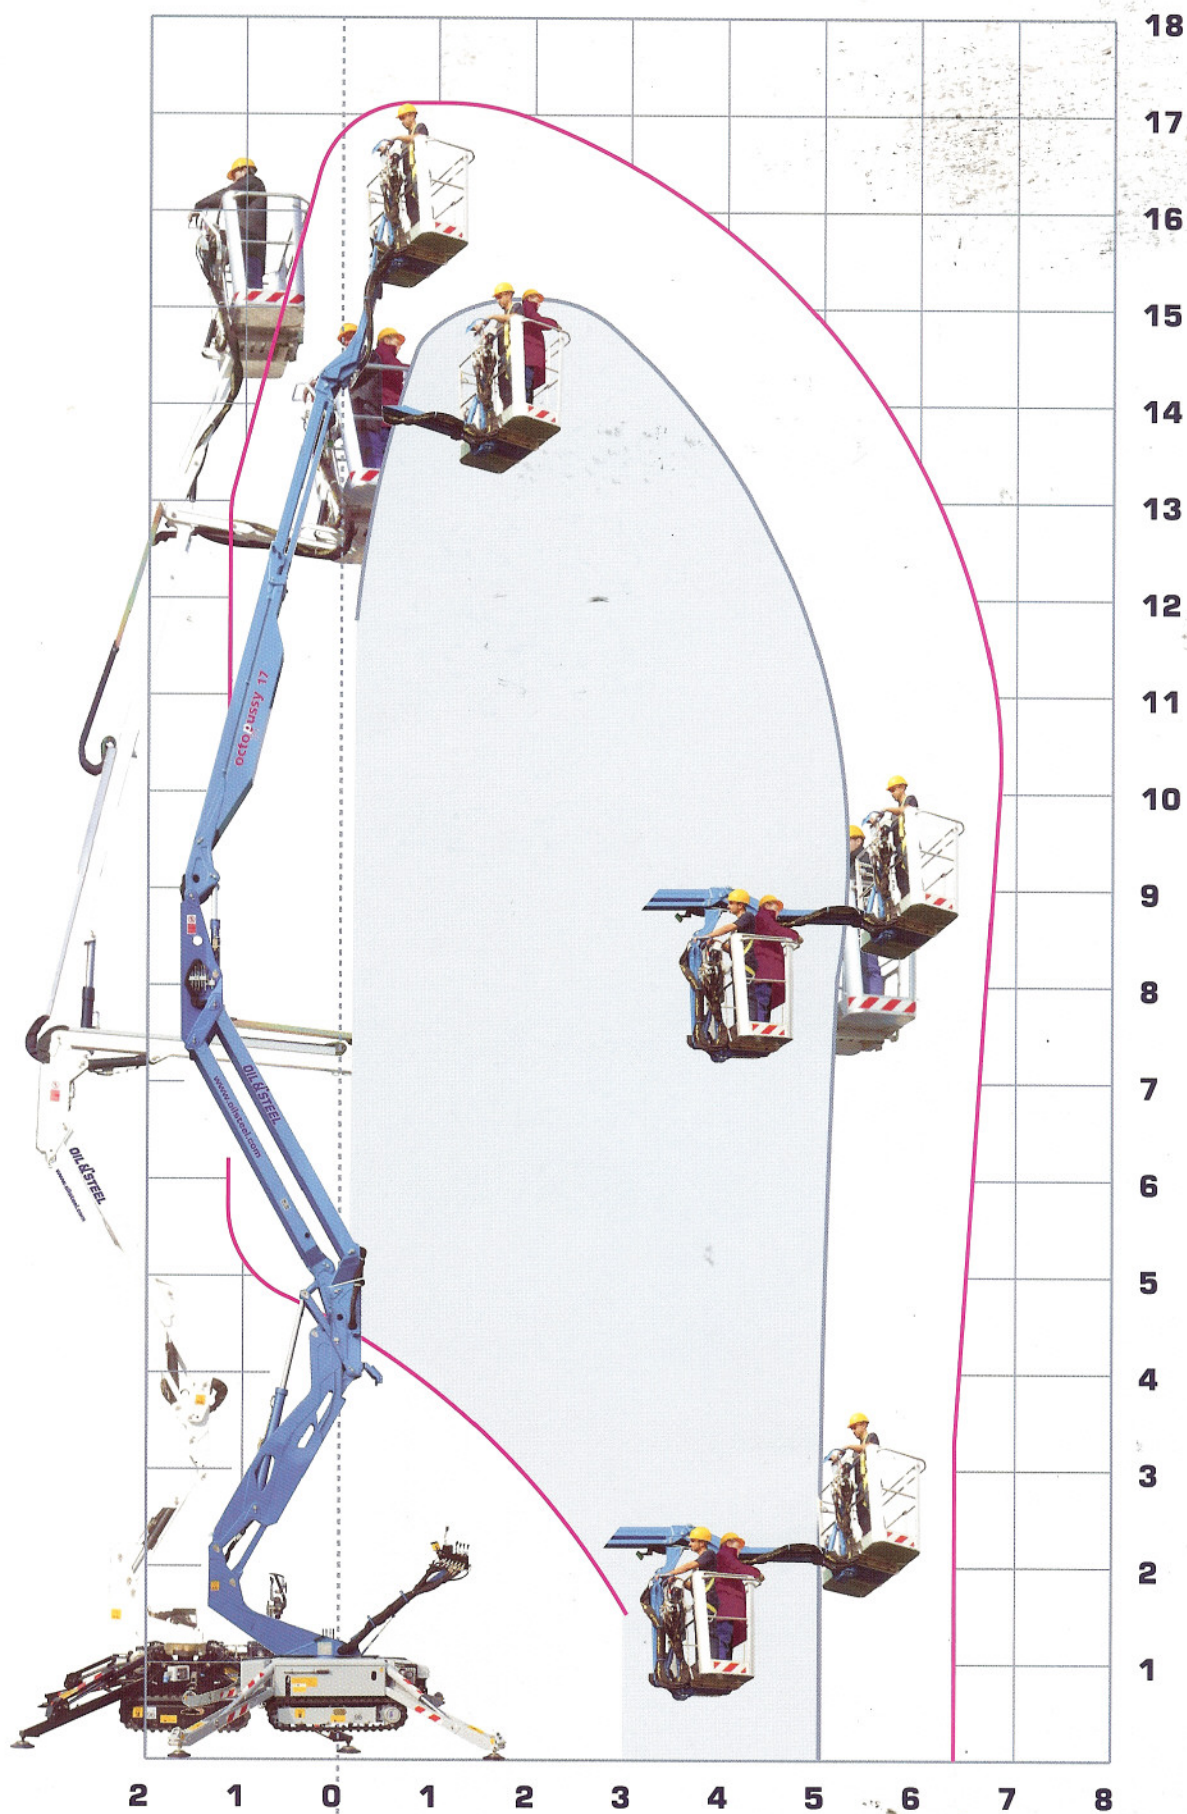

120 Kg = —



200 Kg = —

